

DN12 ALUMINUM (1/2")

PLUS

- Stainless Steel Screws
- Replaceable Inlet/Outlet valves
- Four Inlet and Four Outlet Ports for easier installations
- Air Treatment unit included



Adjustable Flow Rate

Inlet/Outlet Ports

Solids Max Size

Max suction lift dry / wet

Air Inlet

Air Supply Pressure (Min / Max)

Weight

Noise Level

Diaphragms, gaskets, valves

0÷28 l/min

1/2" Gas Thread (4+4 Ports)

3 mm

4 / 7 m


1/4" Gas

1 / 6.8 bar

5,6 Kg

<78 dB [A]

Configurable based on the fluid to process

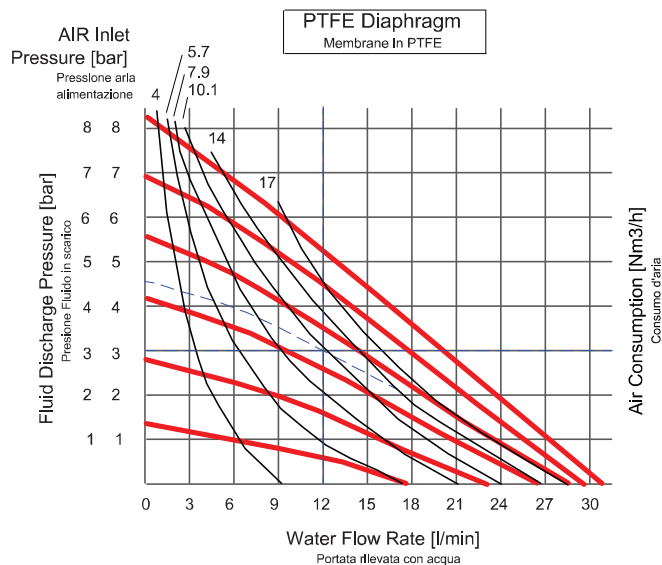

Per pompare 12 l/min ad una pressione di 3 bar, si richiedono di 4,6 bar di alimentazione con consumo d'aria di 14 Nm3/h.
To pump 12 lpm against a discharge pressure head of 3 bar, requires 4.6 bar and 14 Nm3/h air consumption.

