


DN15 ALUMINUM (1/2")

PLUS

- Stainless Steel Screws
- Replaceable Inlet/Outlet valves
- Four Inlet and Four Outlet Ports for easier installations

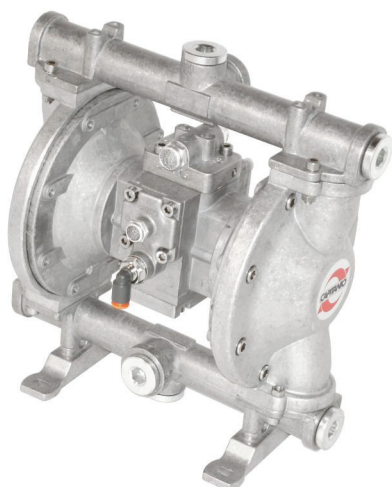

TECHNICAL DATA

Adjustable Flow Rate

Inlet/Outlet Ports

Solids Max Size

Max suction lift dry / wet

Air Inlet

Air Supply Pressure (Min / Max)

Weight

Noise Level

Diaphragms, gaskets, valves

0÷52 l/min

1/2" Gas Thread (4+4 Ports)

3 mm

4,5 / 7 m

1/4" Gas


1 / 6.8 bar


4,5 Kg

<78 dB [A]

Configurable based on the fluid to process

PERFORMANCE

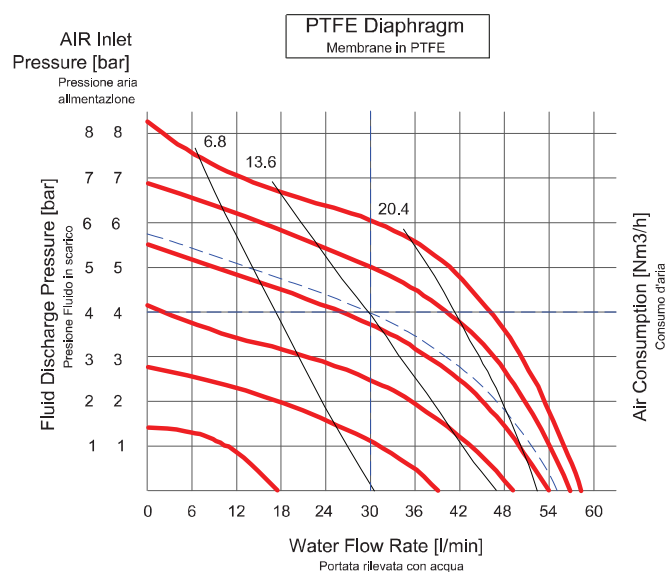



DIMENSIONS

